

Material Designation	
EN	Cu-DHP
UNS*	C12200

\* Unified Numbering System (USA)

Chemical Composition (Reference)	
Cu	≥ 99.90 %
P	0.015–0.040 %

**Typical Applications**

- Apparatus industry
- Pipelines
- Mineral insulated cables
- Strip for plating
- Heat exchangers
- Construction industry
- Transistors

Physical Properties*		
Electrical Conductivity***	MS/m %IACS	46 79
Thermal Conductivity	W/(m·K)	340
Coefficient of Electrical Resistance**	10 <sup>-3</sup> /K	3.4
Coefficient of Thermal Expansion**	10 <sup>-6</sup> /K	17.6
Density	g/cm <sup>3</sup>	8.94
Modulus of Elasticity	GPa	132
Specific Heat	J/(g·K)	0.386
Poisson's Ratio		0.34

\* Reference values at room temperature

\*\* Between 0 and 300 °C

\*\*\* Minimum value in soft temper

Fabrication Properties	
Capacity for Being Cold Worked	excellent
Machinability	less suitable
Capacity for Being Electroplated	excellent
Capacity for Being Hot-Dip Tinned	excellent
Soft Soldering	excellent
Resistance Welding	less suitable
Gas Shielded Arc Welding	excellent
Laser Welding	good

**Corrosion Resistance**


Resistant to: industrial atmosphere (formation of dark resp. green protective layers), industrial and drinking water (max. flow rate approx. 1.5 to 2 m/s), pure water vapour, non oxidizing acids, alkalis (except for ammonia and cyanide-containing compounds), neutral saline solutions.

Not resistant to: oxidizing acids, hydrous ammonia and halogenated gases, hydrogen sulfide, seawater, especially with high flow rates.


Mechanical Properties					
Temper		R220	R240	R290	R360
Tensile Strength R <sub>m</sub>	MPa	220–260	240–300	290–360	≥ 360
Yield Strength R <sub>p0.2</sub>	MPa	≤ 140	≥ 180	≥ 250	≥ 320
Elongation A <sub>50mm</sub>	%	≥ 33	≥ 8	≥ 4	≥ 2

Temper	H040	H065	H090	H110
Hardness HV	45–65	65–95	90–110	≥ 110

**Electrical Conductivity**

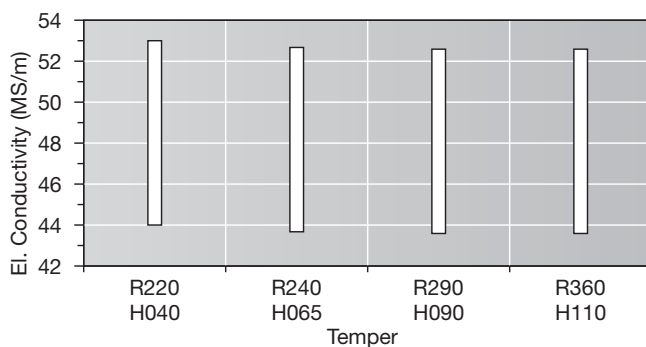


**Bendability (Strip Thickness t ≤ 0.5 mm)**

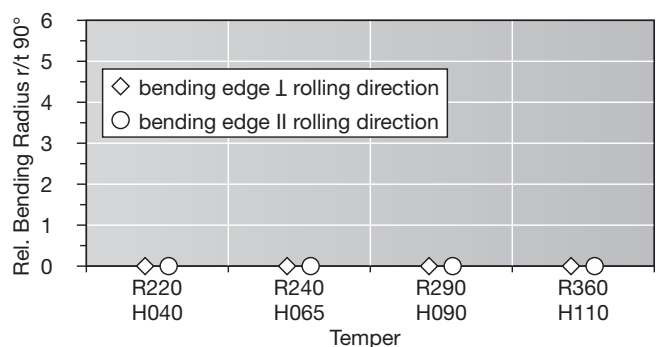

# Wieland-K19<sup>®</sup>


SF-Cu  
C12200

## Resistance to Softening

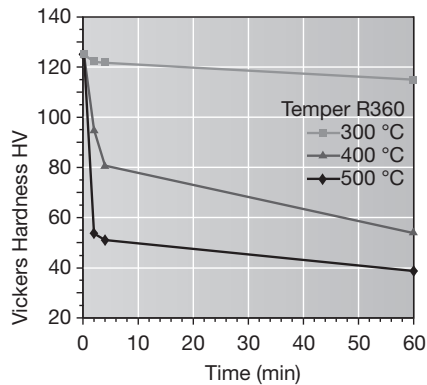

Vickers hardness  
after heat treatment  
(typical values)

## Thermal Stress Relaxation

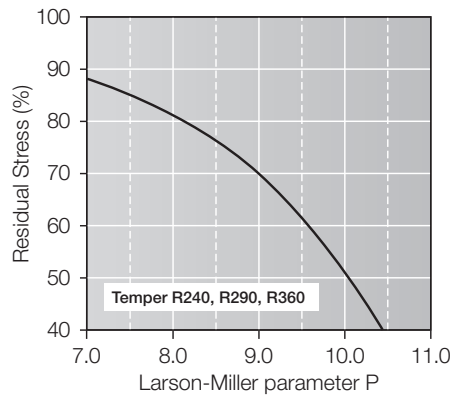

Stress remaining after thermal relaxation as a function of Larson-Miller parameter (F. R. Larson, J. Miller, Trans ASME74 (1952) 765–775) given by:  
 $P = (20 + \log(t))(T + 273) \cdot 0.001$ .  
Time t in hours, temperature T in °C.  
Example: P = 9 is equivalent to 1.000 h/118 °C.

Measured on rolled to temper specimens parallel to rolling direction. Total stress relaxation depends on the applied stress level. Furthermore, it is increased to some extent by cold deformation.

## Fatigue Strength

The fatigue strength is defined as the maximum bending stress amplitude which a material withstands for  $10^7$  load cycles under symmetrical alternate load without breaking. It is dependent on the temper tested and is about  $\frac{1}{3}$  of the tensile strength  $R_m$ .

## Types and Formats Available

- Standard coils with outside diameters up to 1400 mm
- Traverse-wound coils with drum weights up to 1.5 t
- Hot-dip tinned strip
- Contour-milled strip

## Dimensions Available

- Strip thickness from 0.10 mm, thinner gauges on request
- Strip width from 3 mm, however min. 10 x strip thickness

Wieland-Werke AG

[www.wieland.com](http://www.wieland.com)

Graf-Arco-Str. 36, 89079 Ulm, Germany, Phone +49 731 944 2030, Fax +49 731 944 4257, [info@wieland.de](mailto:info@wieland.de)

This leaflet is for your general information only and is not subject to revision. No claims can be derived from it unless there is evidence of intent or gross negligence. The data given are no warranty that the product is of a specified quality and they cannot replace expert advice or the customer's own tests.